

TDD : XXXXPoi 2300~2690MHz/3300~3800MHz BCH65°/65° 16/16.5 dBi 2~12° Beamforming
 FDD :XXXXXPoi 698~960MHz×2/1710~2690MHz×2/1427~2690MHz×2 65°/65°/65° 16/16/15.5dBi 2°~12°/2°~12°/2°~12° Integrated and replaceable RCU (Remote Control Unit) Antenna



Electrical Specifications-TDD					
General Parameters	Frequency range(MHz)		P1-2300~3800		
			2300~2690	3300~3800	
	Polarization		±45°		
	Electrical downtilt(°)		2~12		
Electrical downtilt tolerance(°)		±1			
Calibration and Electrical Parameters	Coupling factor between calibration port and each antenna port(dB)		-26±2		
	Max.amplitude tolerance from calibration port to input ports(dB)		<0.9		
	Max.phase tolerance from calibration port to input ports(°)		≤8		
	Ports VSWR		≤1.5		
	Co-polarization isolation between ports(dB)		≥20		
	Cross-polarization isolation between ports(dB)		≥ 22		
Radiation Parameters	Single Column Beam	Horizontal 3dB beam width(°)		90±15	60±15
		Gain(dBi)		14.3±1	15.7±1
		Vertical 3dB beam width(°)		7±0.8	5±0.6
		Cross polar ratio(0°)(dB)		≥15	
		Front to back ratio(dB)		≥22	≥23
		Vertical sidelobe suppression for first sidelobe above main beam(dB)		≥15	
	Broadcast Beam	Gain(dBi)		16±1	16.5±1
		SPR(±60°)(%)		≥90	
		Vertical 3dB beam width(°)		7±0.8	5±0.6
		Front to back ratio(dB)		≥25	
	Service Beam	0° direct beam gain(dBi)		19.8±1	21±1
		0° direct beam horizontal 3dB beam width(°)		26±3	18±3
		0° direct beam sidelobe suppression(dB)		≥10	
		0° direct beam cross polar ratio(axial)(dB)		≥18	
		0° direct beam front to back ratio(dB)		≥25	
		±30° direct beam gain(dBi)		18.5±1	18.5±1
	Soft Split multi-beam	Gain (dBi)		19.4±1	/
		Horizontal 3dB beam width(°)		30±3	/
		Front to back ratio(dB)		≥28	/
		Cross polar ratio at boresight(dB)		≥18	/

Electrical Specifications								
Frequency range (MHz)	R1/R2 -698~960				Y2/Y4 -1710~2690			
	698~803	790~862	824~894	880~960	1710~1990	1920~2200	2200~2490	2490~2690
Polarization	±45°				±45°			
Gain at mid tilt (dBi)	14.3	14.8	15.2	15.5	14.8	15.2	15.5	15.6
Gain over all tilts (dBi)	14.2±0.5	14.7±0.5	15±0.5	15.3±0.5	14.6±0.5	15±0.5	15.3±0.5	15.4±0.5
Horizontal 3dB beamwidth (°)	68±5	66±4	65±5	64±4	68±6	67±6	61±5	58±6
Vertical 3dB beamwidth (°)	11.5±0.9	10.4±0.8	10±0.6	9.4±0.5	9.3±0.6	8.4±0.5	7.4±0.5	6.6±0.5
Front to back ratio (dB) Total power, ±30°	>21	>23	>24	>23	>25	>25	>25	>23
Cross polar ratio (dB) (at Boresight)	>17	>17	>17	>18	>17	>18	>17	>16
Electrical downtilt (°)	2~12				2~12			
Sidelobe suppression (dB) (First sidelobe above main beam)	>15	>15	>15	>15	>15	>15	>15	>15
VSWR	<1.5				<1.5			
Isolation: intra-system (dB)	≥25				≥25			
Isolation: inter-system (dB)	R1//R2≥25 R1,R2//other≥25				>25			
Intermodulation IM3 (2×43dBm carrier)	≤-150 dBc				≤-150 dBc			
Impedance (Ω)	50				50			
Max. power per input (W) @50°C	400				200			
Lightning protection	Dc Ground				Dc Ground			

Electrical Specifications					
Frequency Range (MHz)	Y1/Y3 -1427~2690				
	1427~1518	1710~1990	1920~2200	2200~2490	2490~2690
Polarization	±45°				
Gain at mid tilt (dBi)	13.3	14.3	14.7	15.5	15.3
Gain over all tilts (dBi)	13.1±0.5	14±0.5	14.5±0.6	15.3±0.8	15.1±0.5
Horizontal 3dB beamwidth (°)	70±5	67±6	64±5	61±4	59±5
Vertical 3dB beamwidth (°)	13.4±1.0	10.6±1.0	9.6±0.8	8.4±0.7	7.6±0.6
Front to back ratio (dB) Total power, ±30°	>24	>25	>25	>24	>24
Cross polar ratio (dB) (at Boresight)	>17	>18	>18	>18	>18
Electrical downtilt (°)	2~12				
Sidelobe suppression (dB) (First sidelobe above main beam)	>15	>15	>15	>15	>15
VSWR	<1.5				
Isolation: intra-system (dB)	>25				
Isolation: inter-system (dB)	>25				
Intermodulation IM3 (2×43dBm carrier)	≤-150 dBc				
Impedance (Ω)	50				
Max. power per input (W) @50°C	200				
Lightning protection	Dc Ground				

Mechanical Specifications	
Connector	TDD:1×(MQ4+MQ5)-Male FDD:12×4.3-10-Female
Connector position	Bottom
Height × width × depth (mm)	2080×499×198
Packing size (mm)	2465×620×350
Antenna weight (kg)	45.3
Installation kit weight (kg)	7.3
Packing weight (kg)	58.8
Wind load (N,at 150km/h) Frontal/Lateral/Maximum	1100/325/1240
Max. wind velocity (km/h)	250
Radome material	Fiberglass
Radome color	Gray
Mechanical tilt (°)	0~10
Operating temperature (°C)	-50~65
Mounting hardware (mm)	Φ50~Φ115

Integrated RET Properties	
RET model	TRCU-TQ20P3V01
RET type	Integrated (Replaceable)
RET protocol	AISG 2.0/3GPP
Power supply(V)	10-30 DC
Power consumption(W)	≤0.6 (Idle, 12V), ≤6 (In motion, 12V)
Adjustment time (Full Range)	< 4Mins
Adjustment cycles	> 50,000
Temperature range (°C)	-40~65
Lightning protection	3KA(8/20μs) @ Pin5 & Pin3; 5KA(8/20μs) @ Pin1 / Pin6 & Pin7
Connectors	2×8 Pin circle connector according to IEC 60130-9 and AISG. Daisy chain in:Male,Daisy chain out:Female Pin1:12V;Pin3:RS485B;Pin5:RS485A;Pin6:10-30V; Pin7:GND;Pin2&Pin4&Pin8:N/C

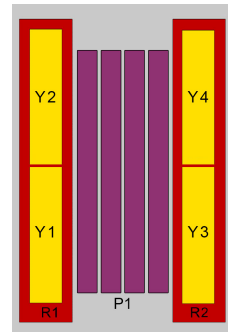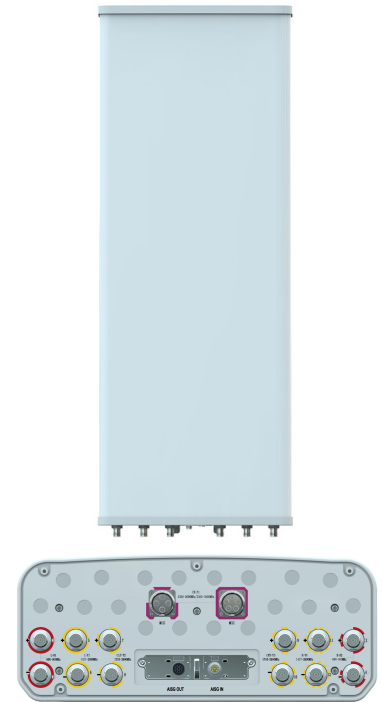

Ant Array	RET Unique ID
R1	TY00000.....R1
R2	TY00000.....R2
Y1	TY00000.....Y1
Y2	TY00000.....Y2
Y3	TY00000.....Y3
Y4	TY00000.....Y4
P1	TY00000.....P1

Antenna Pattern Sample For Reference

