

TDD : XXXXPol 2300~2690MHz/3300~3800MHz BCH 65° 16.5dBi 2~12° Beamforming
FDD : XXXXXXXXPol 698~960MHz×2/1427~2690MHz×2/1710~2690MHz×4 65°/65°/65°16.5/17.5/17.5dBi 2°~12°/2°~12°/2°~12° Integrated and replaceable RCU (Remote Control Unit) Antenna



Electrical Specifications-TDD				
General Parameters	Frequency range(MHz)		P1-2300~3800	
			2300~2690	3300~3800
	Polarization		±45°	
	Electrical downtilt(°)		2~12	
Electrical downtilt tolerance(°)		±1		
Calibration and Electrical Parameters	Coupling factor between calibration port and each antenna port(dB)		-26±2	
	Max.amplitude tolerance from calibration port to input ports(dB)		<0.9	
	Max.phase tolerance from calibration port to input ports(°)		≤8	
	Ports VSWR		≤1.5	
	Co-polarization isolation between ports(dB)		≥20@2~5°;≥22@6~12°	
	Cross-polarization isolation between ports(dB)		≥22	
Radiation Parameters	Single Column Beam	Horizontal 3dB beam width(°)	90±15	65±15
		Gain(dBi)	14.3±0.9	15.3±1.0
		Vertical 3dB beam width(°)	7±0.6	4.7±0.5
		Cross polar ratio(0°)(dB)	≥15	
		Front to back ratio(dB)	≥21	≥23
		Vertical sidelobe suppression for first sidelobe above main beam(dB)	≥14	≥13
	Broadcast Beam	Gain(dBi)	15.8±0.8	16.2±0.8
		SPR(±60°)(%)	≥90	
		Vertical 3dB beam width(°)	7±0.6	4.7±0.5
		Front to back ratio(dB)	≥25	
		Vertical sidelobe suppression for first sidelobe above main beam(dB)	≥14	≥13
	Service Beam	0° direct beam gain(dBi)	20±0.8	20.8±0.8
		0° direct beam horizontal 3dB beam width(°)	≤28	≤25
		0° direct beam sidelobe suppression(dB)	≥10	
		0° direct beam cross polar ratio(axial)(dB)	≥18	
0° direct beam front to back ratio(dB)		≥25		
±30° direct beam gain(dBi)		18.3±0.8	18.5±0.8	

Electrical Specifications								
Frequency range (MHz)	R1/R2 -698~960				Y2/Y3/Y4/Y6 -1710~2690			
	698~803	790~862	824~894	880~960	1710~1990	1920~2200	2200~2490	2490~2690
Polarization	±45°							
Gain at mid tilt (dBi)	15.4	15.8	16.0	16.3	16.1	16.4	17	17.1
Gain over all tilts (dBi)	15.2±0.4	15.6±0.4	15.8±0.4	16.1±0.4	15.9±0.5	16.2±0.6	16.7±0.7	17±0.7
Horizontal 3dB beamwidth (°)	66±8	65±7	65±7	67±8	69±6	67±6	62±6	58±6
Vertical 3dB beamwidth (°)	9.3±0.8	8.3±0.7	8.1±0.6	7.7±0.5	7.5±0.6	6.7±0.6	5.9±0.6	5.3±0.6
Front to back ratio (dB) Total power, ±30°	>21	>23	>24	>25	>24	>25	>25	>24
Cross polar ratio (dB) (at Boresight)	>18	>19	>20	>21	>17	>17	>17	>17
Electrical downtilt (°)	2~12				2~12			
Sidelobe suppression (dB) (First sidelobe above main beam)	>16	>16	>16	>16	>16	>16	>15	>15
VSWR	<1.5							
Isolation: intra-system (dB)	≥25							
Isolation: inter-system (dB)	R1//R2≥25 R1,R2//other≥28				Y2//Y3 ≥ 25 Y2, Y3//Other≥ 28			
Intermodulation IM3 (2×43dBm carrier)	≤-150 dBc							
Impedance (Ω)	50							
Max. power per input (W) @50°C	400				200			
Lightning protection	Dc Ground							

Electrical Specifications					
Frequency Range (MHz)	Y1/Y5 -1427~2690				
	1427~1518	1710~1990	1920~2200	2200~2490	2490~2690
Polarization	±45°				
Gain at mid tilt (dBi)	15.1	16.1	16.4	17	17.1
Gain over all tilts (dBi)	14.9±0.5	15.9±0.5	16.2±0.5	16.7±0.6	17±0.6
Horizontal 3dB beamwidth (°)	63±7	65±6	63±5	60±5	59±6
Vertical 3dB beamwidth (°)	9.3±0.6	7.5±0.6	6.7±0.6	5.9±0.6	5.3±0.6
Front to back ratio (dB) Total power, ±30°	>25	>25	>25	>25	>24
Cross polar ratio (dB) (at Boresight)	>20	>20	>20	>19	>18
Electrical downtilt (°)	2~12				
Sidelobe suppression (dB) (First sidelobe above main beam)	>16	>16	>14	>15	>15
VSWR	<1.5				
Isolation: intra-system (dB)	≥25				
Isolation: inter-system (dB)	≥28				
Intermodulation IM3 (2×43dBm carrier)	≤-150 dBc				
Impedance (Ω)	50				
Max. power per input (W) @50°C	200				
Lightning protection	Dc Ground				

Mechanical Specifications	
Connector	TDD:1×(MQ4+MQ5) Connector-Male FDD:16×4.3-10-Female
Connector position	Bottom
Height × width × depth (mm)	2680×499×198
Packing size (mm)	3120×620×330
Antenna weight (kg)	56
Installation kit weight (kg)	8.4
Packing weight (kg)	73
Wind load (N,at 150km/h) Frontal/Lateral/Maximum	1485/435/1670
Max. wind velocity (km/h)	216
Radome material	Fiberglass
Radome color	Gray
Mechanical tilt (°)	0~8
Operating temperature (°C)	-50~65
Mounting hardware (mm)	Φ50~Φ115

Integrated RET Properties	
RET model	TRCU-TQ20P3V01
RET type	Integrated (Replaceable)
RET protocol	AISG 2.0/3GPP
Power supply(V)	10-30 DC
Power consumption(W)	≤0.6 (Idle, 12V),≤6 (In motion, 12V)
Adjustment time (Full Range)	<4Mins
Adjustment cycles	>50,000
Temperature range (°C)	-40~65
Lightning protection	3KA(8/20μs) @ Pin5 & Pin3; 5KA(8/20μs) @ Pin1 / Pin6 & Pin7
Connectors	2×8 Pin circle connector according to IEC 60130-9 and AISG. Daisy chain in:Male,Daisy chain out:Female Pin1:12V;Pin3:RS485B;Pin5:RS485A;Pin6:10-30V; Pin7:GND;Pin2&Pin4&Pin8:N/C

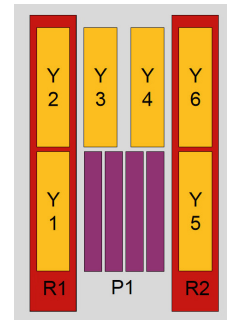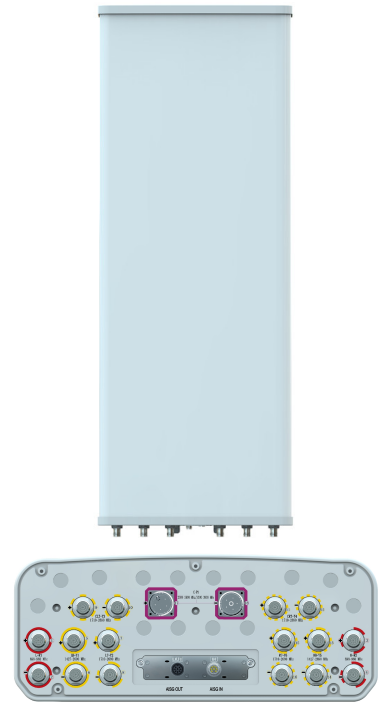

Ant Array	RET Unique ID
R1	TY00000.....R1
R2	TY00000.....R2
Y1	TY00000.....Y1
Y2	TY00000.....Y2
Y3	TY00000.....Y3
Y4	TY00000.....Y4
Y5	TY00000.....Y5
Y6	TY00000.....Y6
P1	TY00000.....P1

Antenna Pattern Sample For Reference

